

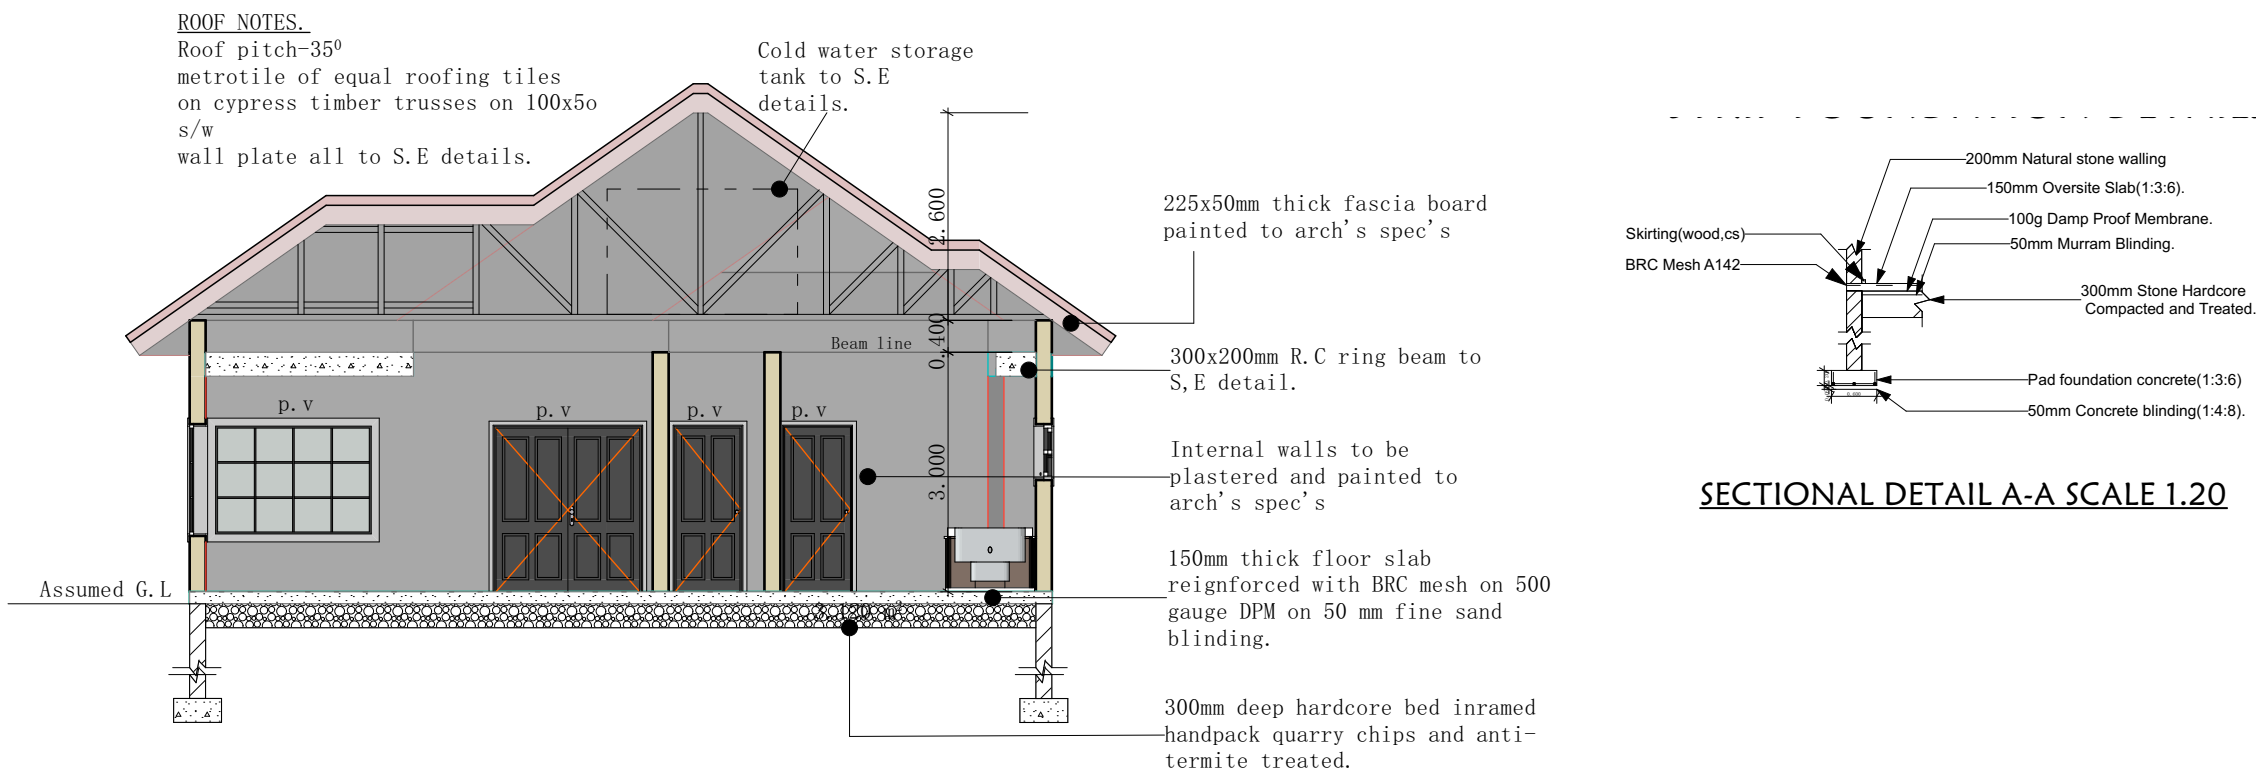
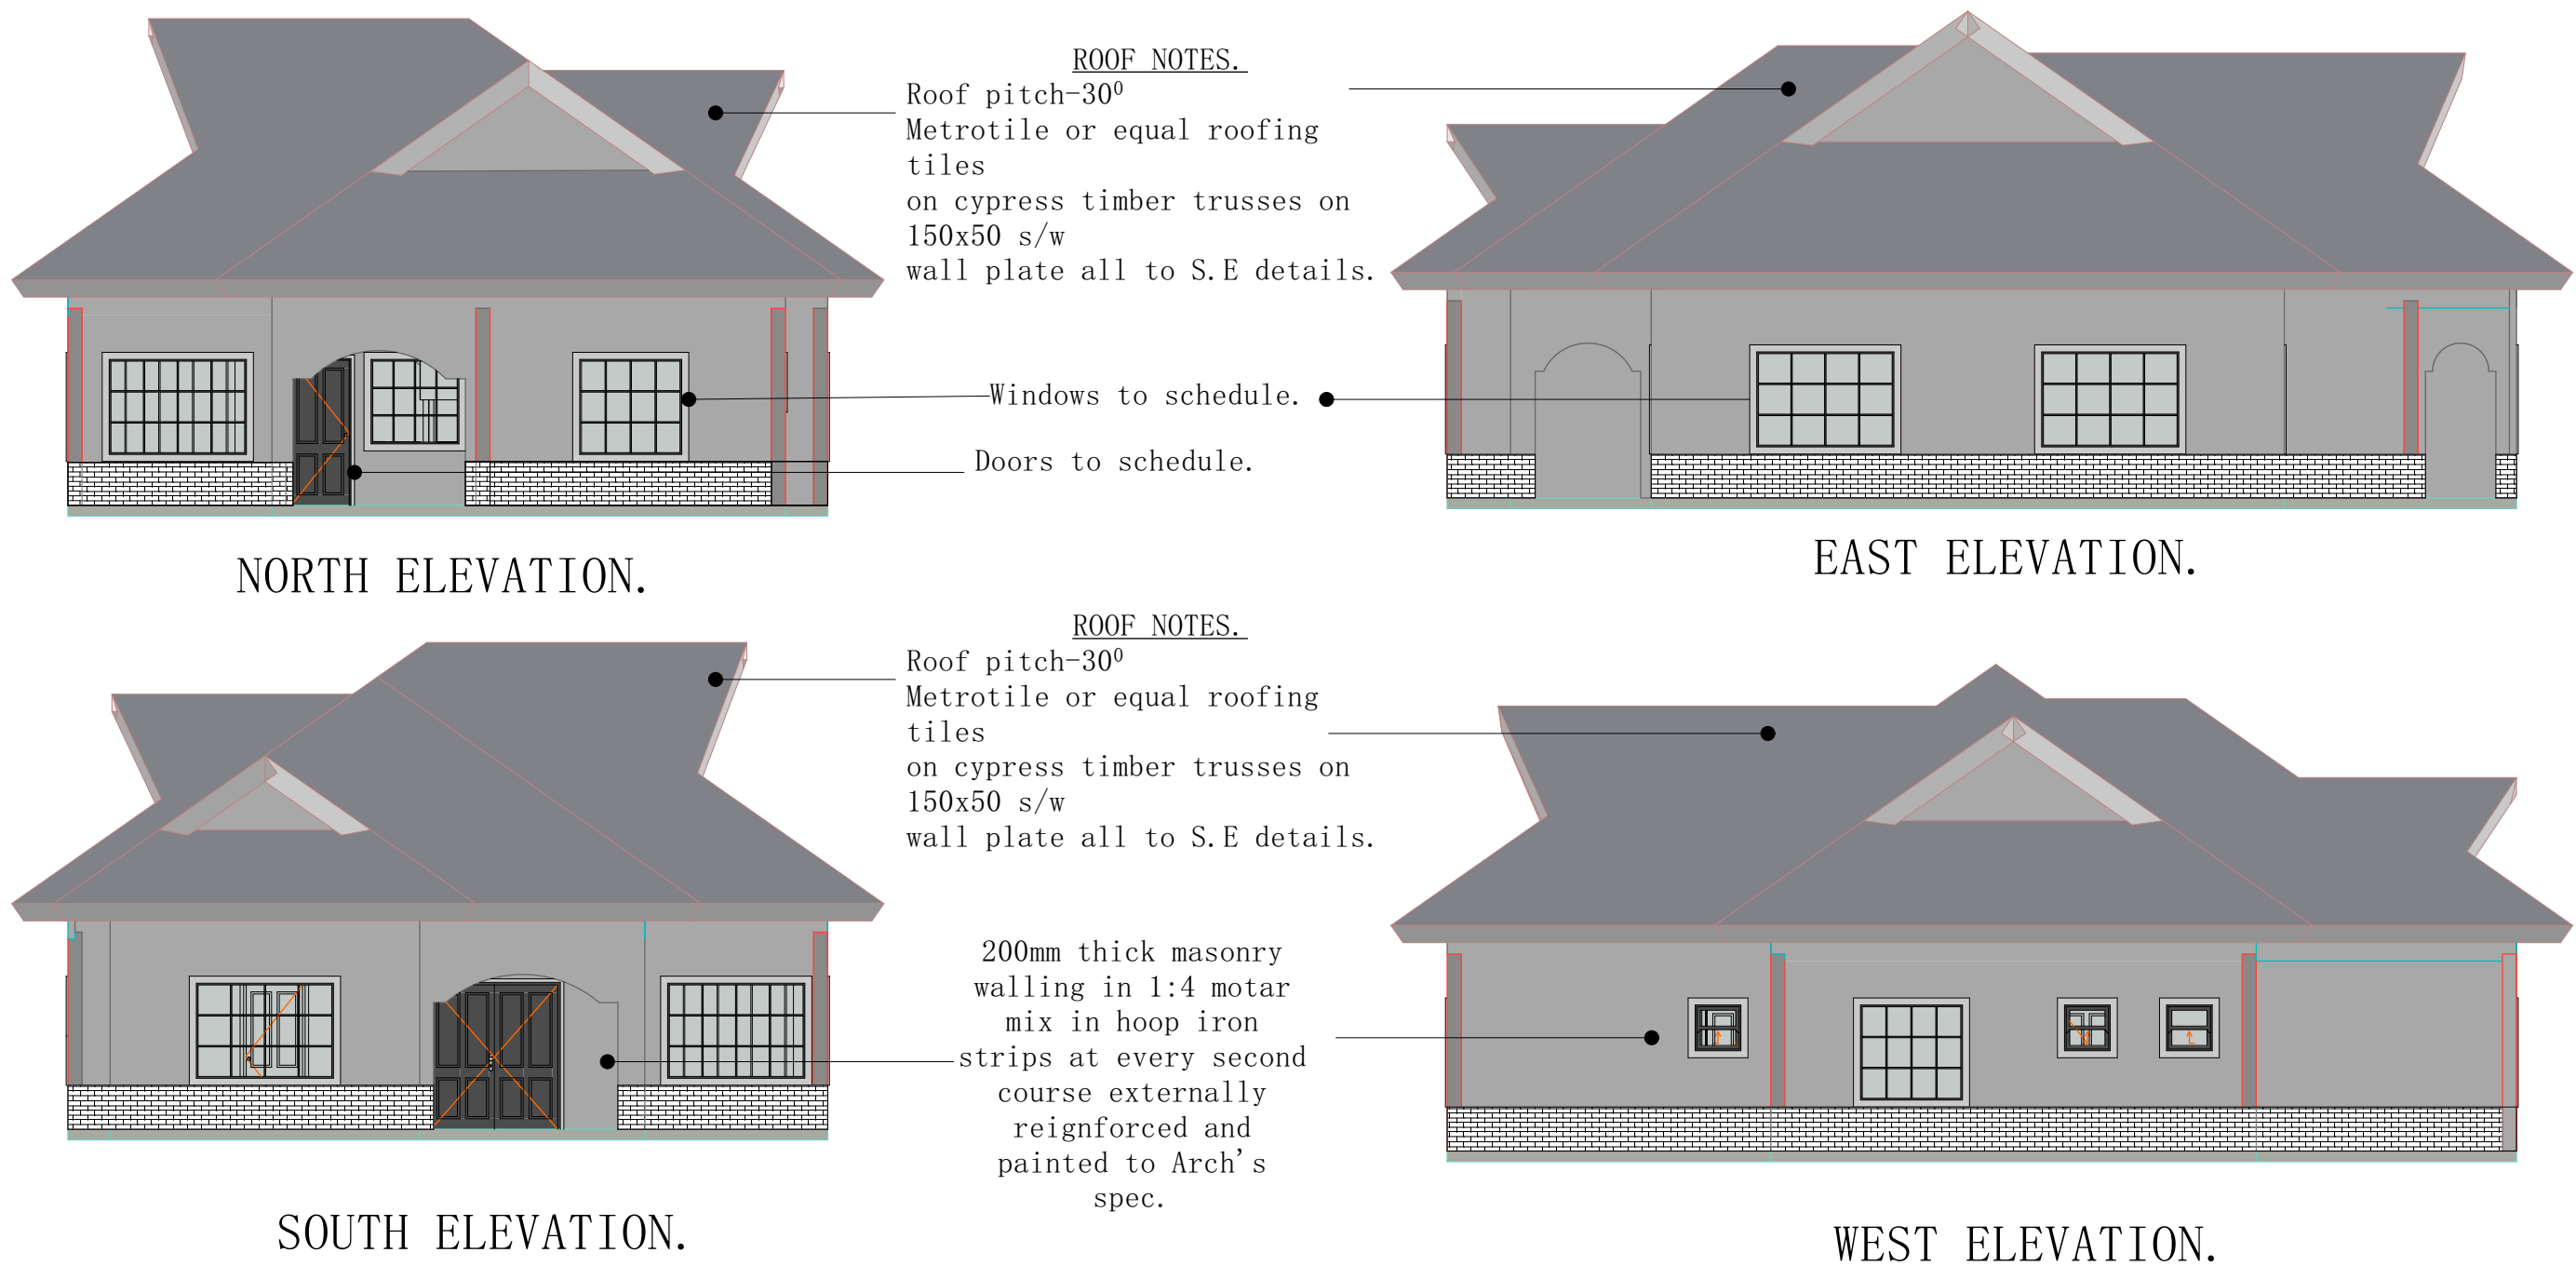
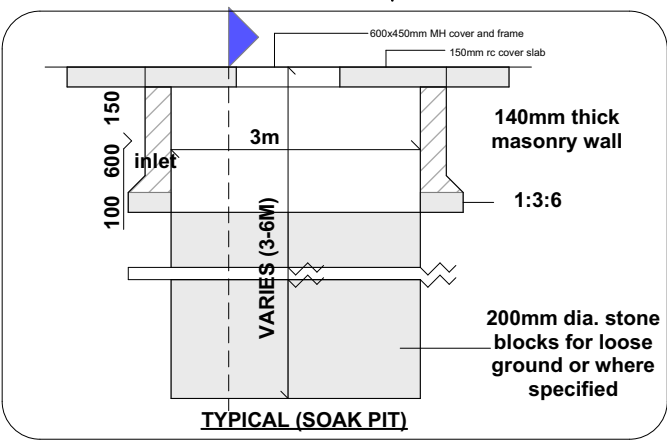
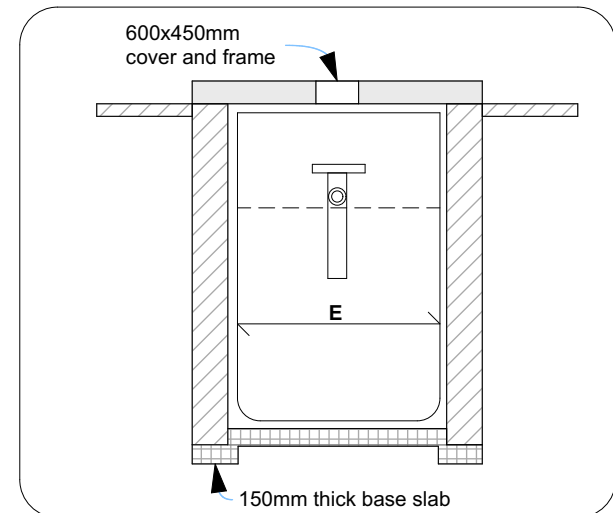



GROUND FLOOR PLAN SCALE 1:100

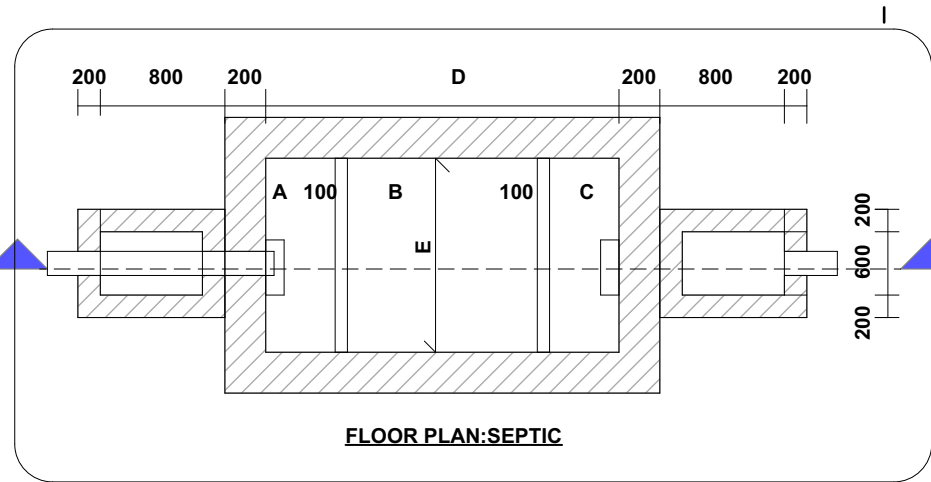

SECTION X-X SCALE 1:100

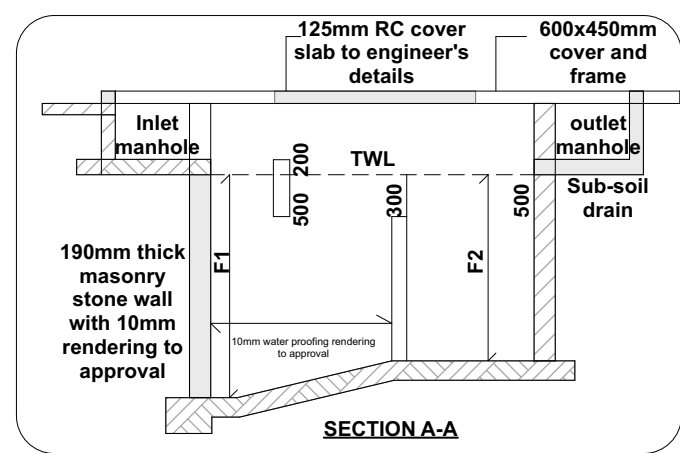


SOAK PIT DETAIL.

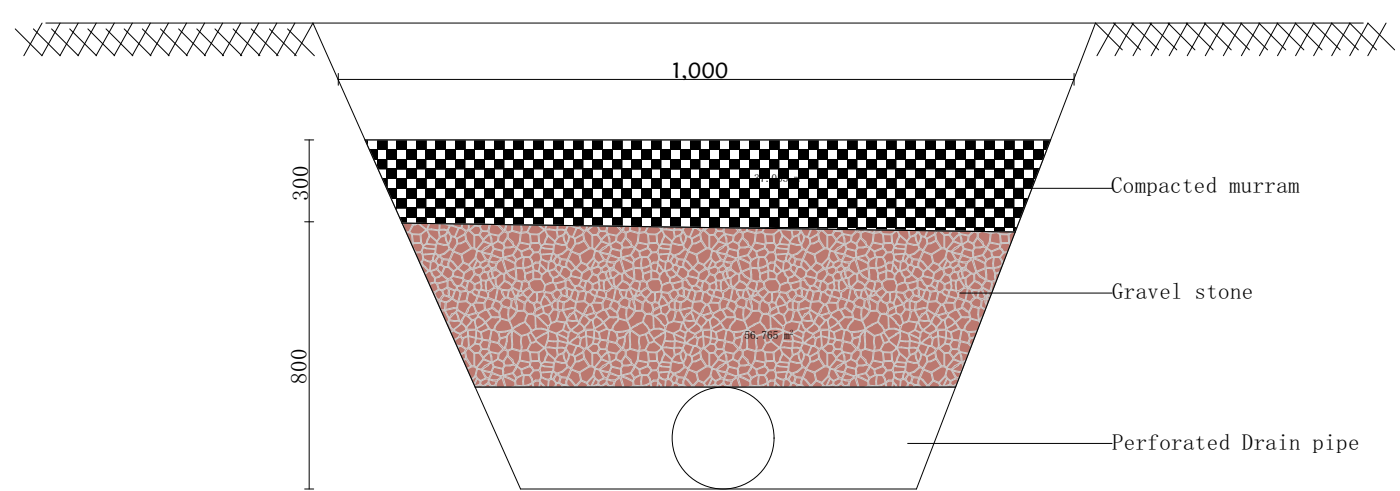

FRENCH DRAIN DETAIL.

SEPTIC									
CAPACITY		NUMBER OF PERSONS	DIMENSIONS IN MILLIMETRES						
TYPE	LITRES		A	B	C	D	E	F1	F2
A	3000	UP TO 10	800	1000	1000		800	1500	1400
B	6000	11-20	800	1400	1200	3600	1400	1500	1400
C	9000	21-30	800	1400	1200	3600	1800	1500	1400
D	12000	31-40	800	1600	1400	4000	2000	1500	1300
E	15000	41-50	800	1600	1400	4000	2400	1500	1200
F	21000	51-60	1200	2400	1600	4800	2400	2000	1800
G	24000	61-70	1400	2400	1800	5200	2600	2200	2000
H	27000	71-80	1400	2600	2000	5600	2600	2400	2000

NOTES
CONCRETE TO BE GRADED 1:2:3 AND TO BE ACCORDING TO GENERAL SPECIFICATION. REINFORCEMENT TO BE MILD STEEL TO BS 5950. MINIMUM COVERS TO BARS SHALL BE 25MM. 1:2 CEMENT/SAND RENDERING TO WALLS AND SCUM BAFFLES.

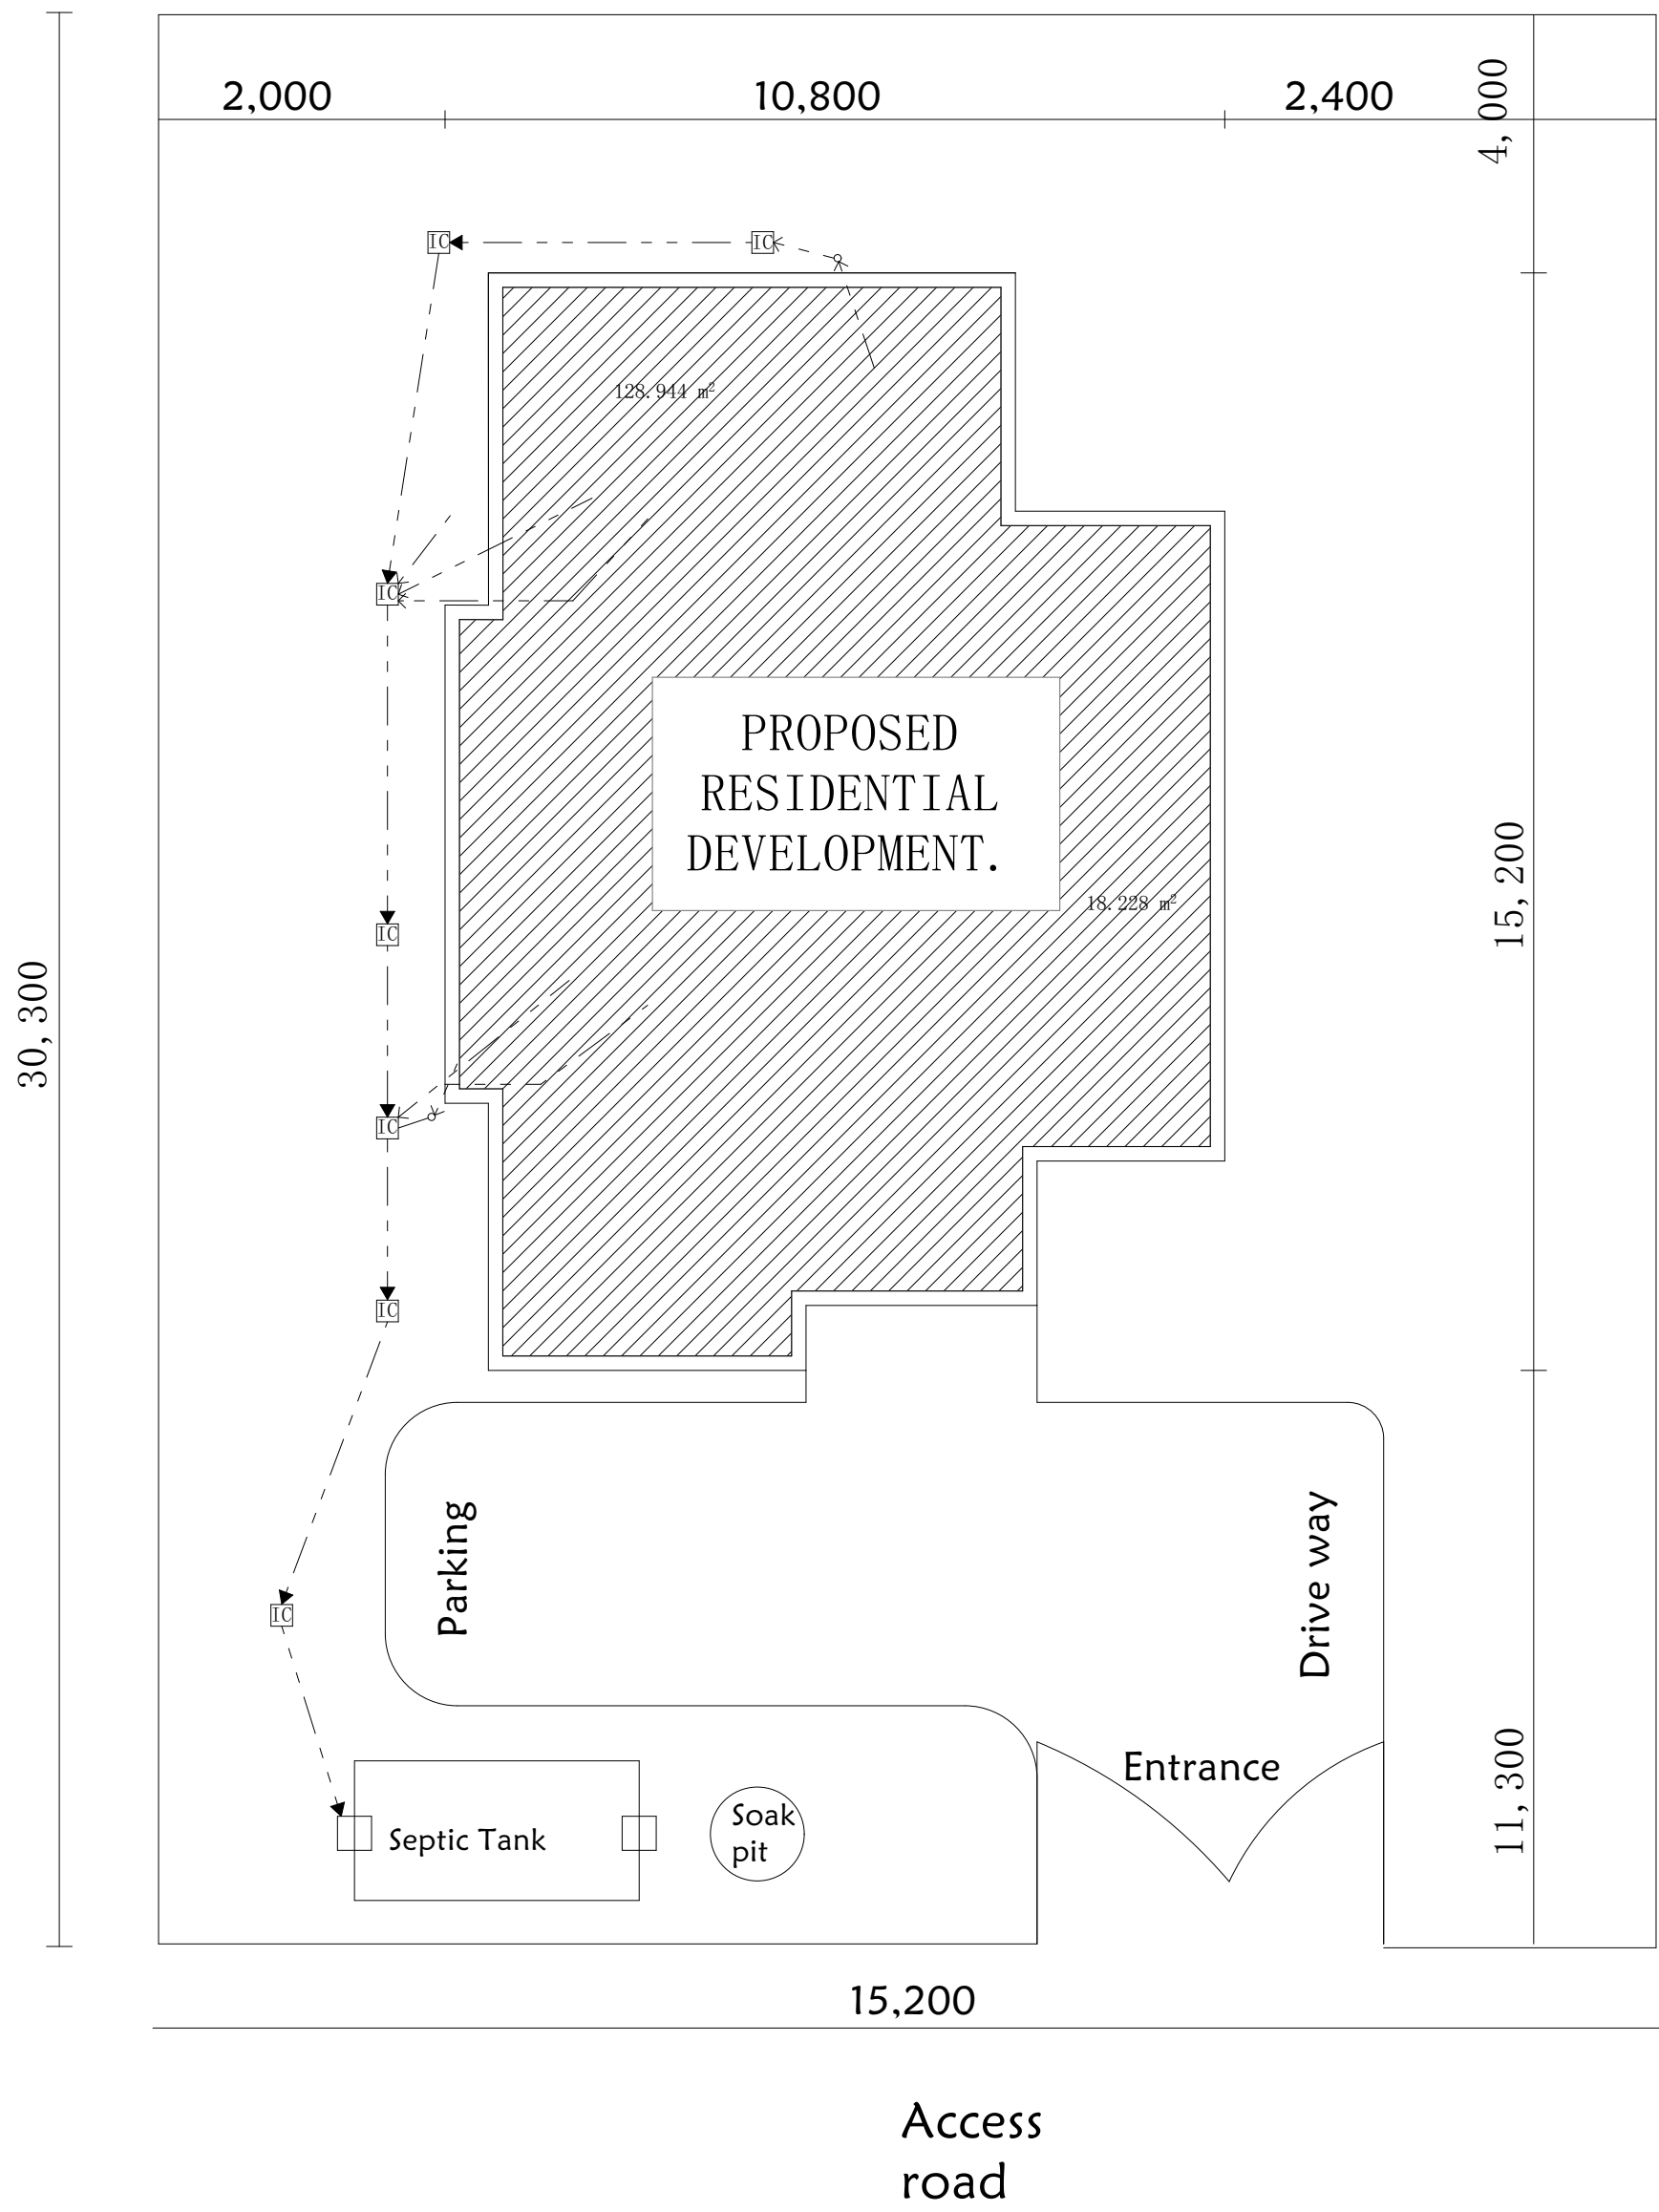

SITE PLAN SCALE 1:200

NOTES

GENERAL

All dimensions to be confirmed on site and any discrepancies reported in to the architect before commencement of any work.
All dimensions are in millimetres unless otherwise specified.
All drainages passing under buildings & driveways to be encased 150 mm thick concrete hauch.
All sanitary works to be executed according to M.O.H rules and regulations.

Anti-termite treatment to be applied around the foundation walls.
DPM to be 500gauge polyethene sheet.

CONSTRUCTION

All slabs at ground level to be poured over 1000 gauge polythene sheeting on 50mm thick murrum blinding layerwhich on 300 hardcore fill.

STRUCTURAL

All black cotton soil to be removed from below all building and paved surfaces Building to be clear of black cotton soil 3m outside the perimeter wall.
Foundation depth to be determined on site to structural engineer's approval.

PROJECT TITLE: PROPOSED RESIDENTIAL DEVELOPMENT ON PLOT PARCEL/LAND NO:

LOCATION:

CLIENT:
Grace Wangechi.
P.O Box



Consultant
LEWISON BUILDERS & CONTRACTORS LTD.
P. O. BOX 1067-20117,
NAIVASHA,
KENYA.

WORKING DRAWING:FLOOR PLANS, SECTIONS, ELEVATIONS,SITE PLAN & SEPTIC DETAILS.

Drawn & designed by:
LEWIS NDICHU

DATE:

Checked by:

DATE:

SCALE:

ALL SHOWN